



KATALOG PROFILI

2012

PRĘTY OKRĄGŁE / ROUND BARS

STOPY / 6060 (DIN AlMgSi 0,5 F19)

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)

Waga / Weight:

$$(kg/m) = 0,0027 \times \frac{\pi D^2}{4}$$



WYMIARY DIMENSION (mm)	OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
Ø D			
3	9,42	0,02	80021
5	15,71	0,05	80016
6	18,85	0,08	80001
8	25,13	0,14	80002
10	31,42	0,21	80003
12	37,7	0,3	80004
13	40,84	0,36	80015
14	43,98	0,41	80005
15	47,12	0,48	80006
16	50,27	0,54	80007
18	56,55	0,69	80008
20	62,83	0,85	80009
22	69,12	1,21	80010
25	78,54	1,33	80011
28	87,96	1,66	80012
30	94,25	1,9	80013
35	109,96	2,6	80014
39	122,52	3,26	80024
40	125,66	3,39	80020
40,3	126,61	3,44	80023
50	157,08	5,3	80018
56	175,93	6,65	80027
60	188,5	7,64	80019
70	219,91	10,39	80025

PRĘTY KWADRATOWE / SQUARE BARS


STOPY / 6060 (DIN AlMgSi 0,5 F19)

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)

Waga / Weight:

$$(kg/m) = 0,0027 \times A^2$$



WYMIARY DIMENSION (mm)		OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
A	r _{min}			
10	0,5	39,14	0,27	82001
12	0,5	47,14	0,39	82002
15	0,5	59,14	0,61	82003
20	1	78,28	1,08	82004
25	1	98,28	1,69	82005
27	0,5	107,14	1,97	82008
30	1	118,28	2,43	82006

PRĘTY PROSTOKĄTNE / RECTANGULAR BARS


STOPY / 6060 (DIN AlMgSi 0,5 F19)

Waga / Weight:

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

(kg/m)=0,0027 x B mm x A mm

6005A (DIN AlMgSi 0,7 F27)



WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	A	l _{min}			
10	3	0,5	25,14	0,08	81001
10	4	0,5	27,14	0,11	81043
12	4	0,5	31,14	0,13	81037
15	2	0,5	33,14	0,08	81052
15	3	0,5	35,14	0,12	81002
15	5	0,5	39,14	0,2	81003
17	3	0,3	39,48	0,14	81090
18	5	0,5	45,14	0,24	81029
20	2	0,5	43,14	0,11	81061
20	3	0,5	45,14	0,16	81004
20	5	0,5	49,79	0,27	81005
20	8	0,2	55,66	0,43	81038
20	18	0,5	75,14	0,97	81057
20	10	0,5	59,14	0,54	81095
25	2	0,5	53,14	0,13	81006
25	3	0,5	55,14	0,2	81007
25	3,5	0,5	56,14	0,24	81060
25	4	0,5	57,14	0,27	81036
25	5	0,5	59,14	0,34	81008
25	8	0,2	65,66	0,54	81039
25	15	0,5	79,14	1,01	81104
30	0,9	0,3	61,28	0,07	81094
30	1	0,5	61,14	0,08	81033
30	2	0,5	63,14	0,16	81009
30	3	0,5	65,14	0,24	81010
30	4	0,5	67,14	0,32	81011
30	5	0,5	69,14	0,4	81012
30	10	0,5	79,14	0,81	81013
30	15	0,5	89,14	1,21	81054
37	1	0,3	75,48	0,1	81083
40	2	0,5	83,14	0,21	81053
40	3	0,5	85,14	0,32	81014
40	4	0,5	87,14	0,43	81015
40	5	0,5	89,14	0,54	81016
40	7	0,5	93,14	0,75	81088
40	8	0,2	95,66	0,86	81040
40	10	0,5	99,14	1,08	81017
40	20	0,5	119,14	2,16	81018
45	5	0,5	99,14	0,61	81050/81100
50	2	0,5	103,14	0,27	81019
50	4	0,5	107,14	0,54	81035
50	5	0,5	109,14	0,67	81020
50	8	0,5	115,14	1,08	81089
50	10	1	118,28	1,35	81021


WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	A	r _{min}			
50	20	0,5	139,14	2,7	81092
55	4	0,2	117,65	0,59	81051
60	3	0,5	125,14	0,49	81084
60	4	0,5	127,14	0,65	81044
60	5	0,5	129,14	0,81	81022
60	6	0,5	131,14	0,97	81023
60	10	0,5	139,14	1,62	81024
60	15	0,75	148,71	2,43	81025
60	20	0,5	159,14	3,24	81096
60	30	0,5	179,14	4,86	81067
75	1,5	0,3	152,48	0,30	81103
75	3	0,5	155,14	0,61	81087
80	5	0,5	169,14	1,08	81065
80	8	0,5	175,14	1,73	81026
80	10	0,5	178,28	2,18	81027
90	3	0,2	185,7	0,73	81070
100	6	0,5	211,14	1,62	81101
100	10	0,5	219,14	2,7	81093
100	15	1	228,28	4,05	81028
150	15	1	328,28	6,07	81098
150	30	1	358,28	12,15	81099
186	10,5	0,5	392,14	5,27	81064
192	5	0,2	393,66	2,58	81056
200	10	0,5	419,14	5,4	81102
200	20	1	438,28	10,8	81097

RURY OKRĄGŁE / ROUND PIPES

STOPY / 6060 (DIN AlMgSi 0,5 F19)

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)



WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
Ø D	Ø d	A			
5	3,2	0,9	15,71	0,03	90123
5	3	1	15,71	0,03	90052
6	2,5	1,75	18,85	0,06	90108
8	6	1	25,13	0,06	90068
8	5,6	1,2	25,13	0,07	90002
10	8	1	31,42	0,08	90001
12	10	1	37,7	0,09	90003
12	9,6	1,2	37,7	0,11	90188
12	9	1,5	37,7	0,13	90116
12	6,8	2,6	37,7	0,21	90136
12,7	11,1	0,8	39,9	0,08	90085
13	11	1	40,84	0,1	90175
14	12	1	43,98	0,11	90036
15	12	1,5	47,12	0,17	90004
15	11	2	47,12	0,22	90067

WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
Ø D	Ø d	A			
16	14	1	50,30	0,13	90033
16	13	1,5	50,27	0,18	90005
16	12	2	50,26	0,24	90106
17	15	1	53,41	0,13	90115
17	14	1,5	53,41	0,2	90118
18	16	1	56,55	0,14	90037
18	14	2	56,55	0,27	90126
19	17	1	59,69	0,15	90035
19	16	1,5	59,69	0,22	90007
19,6	17	1,3	61,58	0,2	90044
20	18	1	62,83	0,16	90008
20	17	1,5	62,83	0,24	90009
20	17	1,5	62,83	0,24	90179
20	16	2	62,83	0,3	90177
21,8	19,8	1	68,49	0,18	90046
22	20	1	69,12	0,18	90010
22	19	1,5	69,12	0,26	90011
22,5	20,1	1,2	70,69	0,22	90041
22,5	19,5	1,5	70,69	0,27	90012
23,5	21,7	0,9	73,82	0,17	90112
24	22	1	75,39	0,19	90089
25	23	1	78,54	0,2	90013
25	22	1,5	78,54	0,3	90014
25	21	2	78,54	0,39	90015
26	23	1,5	81,68	0,32	90057
26	24	1	81,68	0,21	90130
28	26	1	87,96	0,23	90182
28	26	1	87,96	0,23	90042
28	25	1,5	87,96	0,34	90016
28	14	7	87,96	1,25	90045
29	25	2	91,11	0,46	90127
30	28	1	94,25	0,25	90030
30	27	1,5	94,25	0,36	90128
30	26	2	94,25	0,48	90180
30	26	2	94,25	0,48	90017
30	24	3	94,25	0,69	90181
30	24	3	94,25	0,69	90034
30	14	8	94,24	1,49	90098
31	28	1,5	97,39	0,38	90018
32	30	1	100,53	0,26	90031
32	26	3	100,53	0,74	90142
32	16	8	100,53	1,63	90099
32	22	5	100,53	1,15	90186
34	32	1	106,81	0,28	90032
35	32	1,5	109,96	0,43	90019
35	31	2	109,96	0,56	90020
35	29	3	109,96	0,81	90134
35	25	5	109,96	1,27	90151
36	16	10	113,09	2,2	90100
36	34	1	113,1	0,3	90170


WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
Ø D	Ø d	A			
40	38	1	125,66	0,33	90183
40	37	1,5	125,66	0,49	90021
40	36	2	125,66	0,64	90066
40	34	3	125,66	0,94	90022
40	20	10	125,66	2,54	90101
42	30	6	131,95	1,83	90140
43	40	1,5	135,09	0,53	90029
45	41	2	141,37	0,73	90023
45	39	3	141,37	1,07	90148
48	42	3	150,8	1,14	90059
48	40	4	150,8	1,49	90159
50	47,6	1,2	157,08	0,5	90069
50	47	1,5	157,08	0,62	90028
50	46	2	157,08	0,81	90024
50	45	2,5	157,08	1,01	90092
50	44	3	157,08	1,2	90053
50	30	10	157,08	3,39	90102
54	50	2	169,65	0,88	90025
60	57,5	1,25	188,5	0,62	90144
60	57	1,5	188,5	0,74	90137
60	56	2	188,49	0,98	90087
60	54	3	188,5	1,45	90026
60	50	5	188,5	2,33	90178
60	36	12	188,49	4,88	90103
70	66	2	219,91	1,15	90145
70	65	2,5	219,91	1,43	90171
70	64	3	219,91	1,7	90124
70	46	12	219,12	5,9	90104
74	70	2	232,5	1,22	90147
75	71	2	235,62	1,24	90139
75	69	3	235,62	1,83	90027
76	71,5	2,25	238,76	1,41	90091
80	74	3	251,33	1,96	90076
80	56	12	251,32	6,92	90105
80	70	5	251,33	3,18	90173
85	79	3	267,04	2,09	90185
90	80	5	282,74	3,6	90077
98	95	1,5	307,88	1,23	90146
100	90	5	314,16	4,03	90078
120	112	4	376,99	3,94	90154
125	121	2	392,7	2,09	90167
130	126	2	408,41	2,17	90117
130	124	3	408,41	3,23	90174
133	129,4	1,8	417,83	2	90176
139,5	134,5	2,5	438,25	2,9	90082
140	130	5	439,82	5,73	90121
150	142	4	471,24	4,95	90079

RURY KWADRATOWE / SQUARE PIPES

STOPY / 6060 (DIN AlMgSi 0,5 F19)

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)




WYMIARY DIMENSION (mm)				OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	A	r1	r2 min			
12	1	0,75	0,5	47,14	0,12	91006
15	1	0,75	0,5	59,14	0,15	91003
15	1	0,5	0,5	59,14	0,15	91067
18	1	0,75	0,5	71,14	0,18	91004
20	1	0,75	0,5	79,14	0,21	91005
20	1,5	0,75	0,5	79,14	0,3	91008
20	2	1,5	0,75	78,71	0,39	91001
21	2	0,5	0,75	98,71	0,5	91068
21,5	1,5	1	0,5	85,14	0,33	91018
25	1	0,5	0,75	98,71	0,26	91040
25	1,5	1,5	0,75	98,71	0,38	91009
25	2	1,5	0,75	98,71	0,5	91011
25	2	0,5	0,75	98,71	0,5	91068
27	2	0,5	0,5	107,14	0,54	91041
30	1,5	1	0,75	118,71	0,46	91012
30	2	1,5	0,75	118,71	0,61	91013
30	2	0,5	0,5	119,14	0,6	91044
30	3	0,5	1	118,28	0,87	91064
35	2	1	0,75	138,71	0,71	91002
35	2,5	9	1	138,28	1,06	91025
40	1,2	0,5	0,5	159,14	0,5	91045
40	2	1	0,5	159,14	0,82	91014
40	3	0,5	1	158,28	1,2	91063
40	4	0,5	1	158,28	1,55	91060
45	2	0,5	1	178,28	0,93	91015
50	2,5	1,5	1	198,28	1,29	91016
50	4	0,5	1	198,28	1,98	91061
50	5	3	1	190,28	2,45	91019
55	2	0,5	0,5	219,14	1,14	91054
60	2	0,3	0,2	239,66	1,25	91065
60	2	0,5	0,5	239,14	1,25	91053
60	3	2	5	231,41	1,8	91039
64,5	2	0,5	0,5	259,14	1,36	91047
65	1,5	0,5	0,5	259,14	1,03	91050
70	2	1,5	1	278,71	1,47	91017
70	3	0,5	3	274,85	2,15	91043
80	2	0,5	2,5	315,71	1,67	91033
80	3	0,5	0,5	319,14	2,49	91042
100	2	1	1	398,28	2,02	91069
100	4	0,5	1	398,28	4,14	91062
119,5	2,5	0,5	0,5	477,41	3,19	91035
120	8	2	1	462,83	9,45	91066

RURY PROSTOKĄTNE / RECTANGULAR PIPES

STOPY / 6060 (DIN AIMgSi 0,5 F19)

ALLOYS: 6063 (DIN AIMgSi 0,5 F22)

6005A (DIN AIMgSi 0,7 F27)



WYMIARY DIMENSION (mm)					OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	r1	r2 min			
12	8	0,9	0,2	0,5	39,14	0,09	92057
12	8	1	0,75	0,5	39,14	0,1	92042
12	10	1	0,75	0,5	43,14	0,11	92048
15	10	1,5	1	0,75	48,71	0,18	92017
18	12	1	0,5	0,5	59,14	0,15	92027
20	10	1,5	1,5	1	58,28	0,22	92001
20	13	1	0,5	1,5	63,42	0,16	92020
20	13	1,2	0,5	1,5	63,42	0,2	92018
25	15	1	0,5	0,5	79,14	0,21	92023
25	15	1,5	1	1	78,28	0,3	92002
25	15	1,5	1,5	1,5	77,42	0,3	92003
25	15	2	1,5	1,5	77,42	0,39	92004
30	18	1	0,5	0,5	95,14	0,25	92044
30	18	1	1,5	2,5	91,71	0,24	92088
30	18	1,2	1,5	1	94,28	0,3	92016
30	18	1,5	0,5	0,5	95,14	0,36	92033
30	20	1,5	2,5	4	93,13	0,36	92059
30	20	2	1,5	1	98,28	0,5	92005
35	17	2	1,5	1	102,28	0,52	92006
35	20	1,2	1,3	2,5	105,71	0,33	92040
40	20	1,2	1,3	2,5	115,71	0,36	92041
40	20	2	0,5	0,5	119,14	0,61	92034
40	25	2	1	0,75	128,71	0,66	92007
40	25	2	1,5	1,5	127,42	0,66	92008
45,5	25,5	1,5	1	1	140,28	0,55	92009
50	20	1,5	1	0,5	139,14	0,54	92022
50	20	2	0,5	0,5	139,14	0,71	92089
50	30	2	1	1	158,28	0,82	92010
50	30	2	1,5	1,5	157,42	0,82	92011
50	30	2,5	1	1	158,28	1,01	92012
50	40	3	2	3	174,85	1,35	92021
60	20	2	0,5	0,5	159,14	0,82	92054
60	25	1,2	1,3	2,5	174,85	0,52	92028
60	30	2	0,5	0,5	179,14	0,93	92050
60	40	1,2	0,5	0,5	199,14	0,63	92035
60	40	2	1	1	198,28	1,04	92019
60	40	2,5	0,5	0,5	199,14	1,28	92062
60	40	2,5	1	1	198,28	1,28	92013
60	40	2,5	1,5	1,5	197,42	1,28	92014
60	40	3	0,5	0,5	199,15	1,52	92068
60	40	4	0,5	0,5	200	1,99	92064
80	18	2	0,5	2,5	191,71	1	92037
80	25	1,2	1,3	2,5	205,71	0,65	92039
80	40	1,3	0,5	0,5	239,14	0,82	92036


WYMIARY DIMENSION (mm)					OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	r1	r2 min			
30	20	1	2,5	3,5	93,99	0,25	92049
80	40	2	0,5	1	238,28	1,25	92079
80	40	2,5	1	1	238,28	1,55	92015
80	40	4	0,5	1	238,28	2,42	92080
80	60	3	0,5	0,5	279,14	2,17	92043
80	60	4	0,5	0,5	279,14	2,85	92056
100	20	1,2	0,5	0,5	239,15	0,76	92071
100	20	2	0,3	0,3	239,5	1,25	92078
100	25	1,2	1,3	2,5	245,71	0,78	92038
100	40	4	0,5	1	278,28	2,85	92081
100	50	2	0,5	1	298,28	1,57	92085
100	50	3	0,5	1	298,28	2,33	92086
150	50	4	0,6	0,6	398,97	4,15	92090
200	100	4	0,5	1	598,58	6,3	92087

RURA TRÓJKĄTNA / TRIANGULAR PIPES

STOPY: 6060 (DIN AlMgSi 0,5 F19)

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)




WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	A	r2 min			
100	2	2	292	1,56	74007

TEOWNIKI / T-BARS

STOPY / 6060 (DIN AIMgSi 0,5 F19)

ALLOYS: 6063 (DIN AIMgSi 0,5 F22)

6005A (DIN AIMgSi 0,7 F27)




WYMIARY DIMENSION (mm)					OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	r1	r2 min			
20	20	2	2	0,5	77	0,21	85001
25	25	2	0,75	0,5	98,07	0,26	85006
25	25	3	0,5	0,5	98,28	0,38	85014
30	30	2	0,75	0,5	118,07	0,31	85007
30	30	3	3	0,5	116,14	0,47	85002
40	40	4	4	0,75	154,63	0,84	85003
50	50	5	5	0,75	193,78	1,31	85004
50	80	2	0,3	0,3	258,97	0,69	85023
50	100	2	0,5	0,5	298,28	0,8	85021
60	60	6	4	0,75	234,63	1,86	85005
60	90	5	1	1	296,57	1,95	85010

DWUTEOWNIKI / I-BARS (DOUBLET-BARS)

STOPY / 6060 (DIN AIMgSi 0,5 F19)

ALLOYS: 6063 (DIN AIMgSi 0,5 F22)

6005A (DIN AIMgSi 0,7 F27)




WYMIARY DIMENSION (mm)						OBWÓD PERI- METER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A1	A2	r1	r2 min			
8,8	20	2	1,25	1	0,5	91,67	0,23	87001
34,1	42,2	1,8	2,4	0,5	3	227,08	0,6	87003
100	50	5	5	5	0,75	378,84	2,62	87002

STOPY / 6060 (DIN AlMgSi 0,5 F19)

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)




WYMIARY DIMENSION (mm)				OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B=C	A	r1	r2 min			
12	2	1	1	46,28	0,12	83003
15	1,5	1	0,5	58,5	0,12	83004
15	2	1	1	58,28	0,15	83005
18	2	1	0,5	70,5	0,18	83019
20	1,5	0,3	0,3	79,23	0,15	83111
20	2	2	0,75	77,53	0,21	83006
20	3	3	0,75	77,1	0,31	83002
25	2	2	0,75	97,53	0,26	83007
25	3	3	0,75	97,1	0,39	83008
25	4	0,5	0,5	98,71	0,5	83075
25	5	0,5	0,5	98,71	0,61	83091
25	5	3	0,75	97,1	0,61	83009
30	2	0,5	0,5	118,71	0,31	83082
30	3	3	0,75	117,1	0,47	83010
30	4	4	0,75	116,67	0,61	83011
30	5	5	1	115,71	0,75	83012
35	3	3	0,75	137,1	0,55	83013
35	4	0,5	0,5	138,71	0,71	83118
40	2	2	0,75	157,53	0,43	10105
40	3	0,5	0,5	158,71	0,62	83032
40	4	1	2	157,71	0,82	83029
40	4	4	1	156,14	0,83	83014
40	5	5	0,75	156,24	1,03	83015
50	2	0,5	0,5	198,71	0,53	83028
50	3	3	0,75	197,53	0,79	83016
50	4	0,5	0,5	198,71	1,04	83112
50	5	5	0,75	196,57	1,3	83017
60	5	0,5	0,5	238,71	1,55	83027
60	6	4	0,75	236,67	1,85	83001
80	5	0,5	0,5	318,71	2,1	83113
80	8	0,5	0,5	318,71	3,28	83031
100	6	0,5	0,5	398,71	3,14	83110

STOPY / 6060 (DIN AlMgSi 0,5 F19)

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)




WYMIARY DIMENSION (mm)					OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	r1	r2 min			
10	15	2	1	1	46,28	0,12	83050
10	20	2	1	1	58,28	0,15	83051
12,5	30	2	0,5	0,5	82,85	0,22	83104
15	20	2	2	0,5	68,07	0,18	83052
15	30	2	0,5	0,5	88,71	0,23	83115
20	30	1,4	0,5	0,5	98,71	0,18	83076
20	30	2	2	0,5	98,07	0,26	83061
20	30	3	3	0,5	97,64	0,39	83053
20	40	2	3	1	118,28	0,31	83054
20	60	2	0,5	0,5	158,71	0,43	83114
20	80	2	0,5	0,5	198,71	0,53	83080
25	40	3	3	0,5	127,64	0,51	83055
25	50	2	3	1	148,28	0,39	83056
25	85	4	0,5	0,5	218,71	1,14	83078
30	50	4	4	0,75	156,14	0,83	83057
30	60	3	0,5	0,5	178,71	0,7	83079
35	20	2	0,3	0,3	109,23	0,29	83107
40	60	5	5	0,75	196,24	1,3	83059
40	60	3	3	0,75	197,1	0,79	83058
40	70	4	0,6	0,6	218,45	1,14	83106
40	80	4	0,5	0,5	238,71	1,25	83077
40	120	4	0,4	0,4	318,97	1,68	83117
50	80	6	6	1	255,28	2,01	83060
50	100	5	0,5	0,5	298,71	1,96	83109
50	140	3	0,5	0,5	378,71	1,51	83068
85	25	4	0,5	0,5	218,71	1,14	83078

CEOWNIKI / CHANNEL BARS

STOPY / 6060 (DIN AIMgSi 0,5 F19)

ALLOYS: 6063 (DIN AIMgSi 0,5 F22)

6005A (DIN AIMgSi 0,7 F27)




WYMIARY DIMENSION (mm)						OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	D	r1	r2 min			
8	8	1	1	1	0,5	43,88	0,06	84001
10	8	1	1	0,2	0,2	49,31	0,06	84047
10	10	1,5	1,5	1	0,5	54,85	0,11	84002
12	12	2	2	2	0,5	65	0,18	84003
15	15	2	2	2	0,5	83	0,23	84004
16	30	2	2	0,5	0,5	146,28	0,39	84049
16,3	2	1	1	0,2	1	37,23	0,05	84035
18	18	2	2	2	0,5	101	0,27	84005
20	10	2	2	2	0,75	72,57	0,19	84006
20	20	2	2	2	0,5	113	0,31	84007
21	20	1,4	1,4	0,3	0,3	118,17	0,22	84044
25	15	2	2	0,5	0,5	104,28	0,27	84048
25	15	2	2	2	0,5	103	0,28	84008
25	25	3	3	3	0,5	140,14	0,56	84009
25	40	2	2	0,5	0,5	204,8	0,55	84056
30	20	3	3	3	0,5	130,14	0,51	84010
30	23	1,7	1,7	0,5	0,5	146,88	0,33	84018
30	30	3	3	3	0,75	169,49	0,69	84011
40	20	2	2	0,5	0,2	155,06	0,41	84061
40	25	3	3	3	0,5	170,14	0,69	84012
40	30	3	3	2,5	0,5	189,71	0,77	84040
40	30	4	4	2	0,5	189	1	84017
45	25	2,5	2,5	0,5	0,5	183,28	0,61	84033
50	10	4	4	0,5	0,5	130,28	0,67	84024
50	25	3	3	0,5	0,5	192,28	0,76	84058
50	25	4	4	4	0,3	187,79	1,01	84021
50	30	4	4	4	0,75	206,63	1,12	84013
50	40	4	4	0,5	0,5	250,28	1,32	84052
50	50	4	4	0,5	0,5	290,28	1,53	84022
60	35	3	3	0,5	0,5	252,28	1	84037
60	40	2,5	2,5	0,5	0,5	273,28	0,91	84059
60	40	5	5	5	0,75	263,78	1,78	84014
61,5	40	2,5	2,5	0,5	0,5	275,42	0,92	84045
70	25	3	3	0,5	0,5	232,28	0,92	84060
80	40	5	5	5	0,75	303,78	2,05	84015
103,6	38	1,8	1,8	0,5	0,5	353,88	0,85	84027
117,6	25	2,3	1,8	1	1	328,02	0,95	84029
120	40	4	4	4	1	385,99	2,1	84016
154,4	38	2,5	2,2	1	1	453,22	1,46	84028
168,4	25	2,3	1,9	1	1	429,62	1,28	84030

ZETOWNIKI / Z-BARS

STOPY / 6060 (DIN AlMgSi 0,5 F19)

ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)




WYMIARY DIMENSION (mm)					OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	r1	r2 min			
12	20	2	1	0,5	97,42	0,26	86001
23	30	3	2	0,5	155,76	0,63	86002
35	20	2	2	0,5	141,52	0,38	86003
40	30	3	0,5	0,5	192,28	0,76	86005

KĄTOWNIKI OZDOBNE / DECORATIVE ANGLES

STOPY / 6060 (DIN AlMgSi 0,5 F19)


ALLOYS: 6063 (DIN AlMgSi 0,5 F22)

6005A (DIN AlMgSi 0,7 F27)




WYMIARY DIMENSION (mm)				OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	r1			
20	20	2,5	2	82,73	0,22	10086
30	30	2,5	2	125,65	0,31	10087
35	35	3	2,5	148,94	0,46	10088
40	20	2,5	0,5	126,68	0,36	11386*
40	40	3,5	3	170,34	0,63	10089
50	20	3	3	146,17	0,55	10091*
85	85	3	5	336,71	1,21	11680


* Powierzchnia ozdobna na wymiarze B / Decorative surface of dimension B




72001
0,08 kg/m
obwód/perimeter 33,05 mm




72002
0,09 kg/m
obwód/perimeter 38,88 mm




72003
0,12 kg/m
obwód/perimeter 45,23 mm




72004
0,18 kg/m
obwód/perimeter 52,05 mm




72005
0,18 kg/m
obwód/perimeter 47,77 mm




72006
0,20 kg/m
obwód/perimeter 53,71 mm




72008
0,23 kg/m
obwód/perimeter 64,79 mm

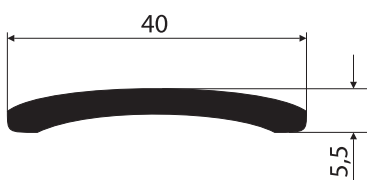


72007
0,34 kg/m
obwód/perimeter 85,69 mm

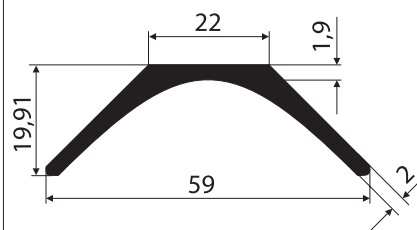


72018
0,46 kg/m
obwód/perimeter 147,91 mm

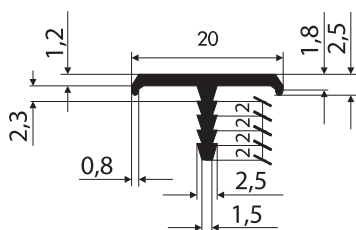


72009
0,12 kg/m
obwód/perimeter 67,84 mm




72010
0,14 kg/m
obwód/perimeter 53,34 mm




72011
0,16 kg/m
obwód/perimeter 70,32 mm




72012
0,18 kg/m
obwód/perimeter 67,16 mm




72013
0,33 kg/m
obwód/perimeter 95,35 mm




72014
0,14 kg/m
obwód/perimeter 50,36 mm

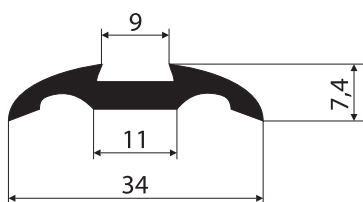


72015
0,29 kg/m
obwód/perimeter 83,24 mm




72016
0,26 kg/m
obwód/perimeter 81,43 mm




72017
0,24 kg/m
obwód/perimeter 90,82 mm




73014
0,18 kg/m
obwód/perimeter 93,80 mm




73002
0,30 kg/m
obwód/perimeter 120,86 mm




73003
0,18 kg/m
obwód/perimeter 82,06 mm




73004
0,14 kg/m
obwód/perimeter 62,26 mm




73005
0,24 kg/m
obwód/perimeter 123,61 mm




73006
0,19 kg/m
obwód/perimeter 90,80 mm




73001
0,14 kg/m
obwód/perimeter 59,99 mm




74001
0,12 kg/m
obwód/perimeter 54,58 mm




74002
0,06 kg/m
obwód/perimeter 44,32 mm




74003
0,18 kg/m
obwód/perimeter 66,28 mm




74004
0,12 kg/m
obwód/perimeter 75,48 mm




74005
0,17 kg/m
obwód/perimeter 110,23 mm

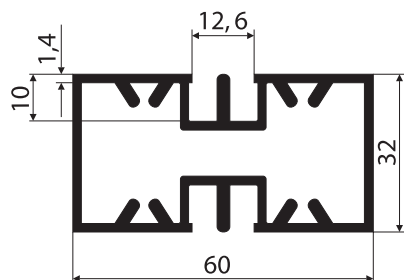


71007
1,18 kg/m
obwód/perimeter 266,25 mm




74006
0,17 kg/m
obwód/perimeter 91,20 mm




91030
0,36 kg/m
obwód/perimeter 99,48 mm




10295
0,14 kg/m
obwód/perimeter 43,74 mm

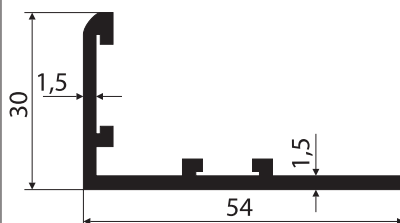


20515
0,42 kg/m
obwód/perimeter 200,95 mm




72021
0,33 kg/m
obwód/perimeter 88,13 mm

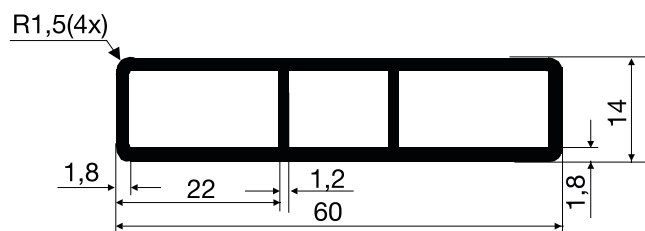


71010
0,747 kg/m
obwód/perimeter 145,42 mm



72023
0,647 kg/m
obwód/perimeter 241,42 mm

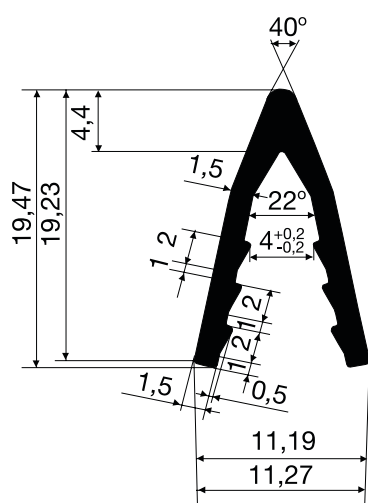

72024
0,173 kg/m
obwód/perimeter 77,46 mm

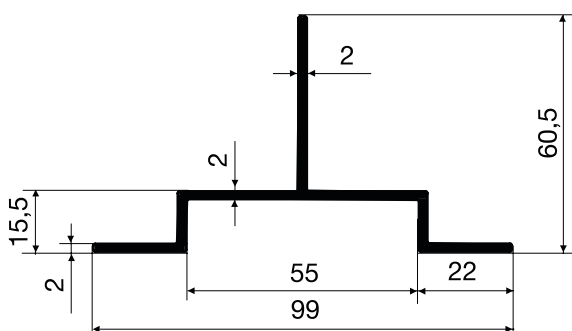


74017
0,923 kg/m
obwód/perimeter 342,57 mm

PROFILE KASETONOWE / FRAMING SECTIONS

STOPY / 6060 (DIN AIMgSi 0,5 F19)


ALLOYS: 6063 (DIN AIMgSi 0,5 F22)

6005A (DIN AIMgSi 0,7 F27)

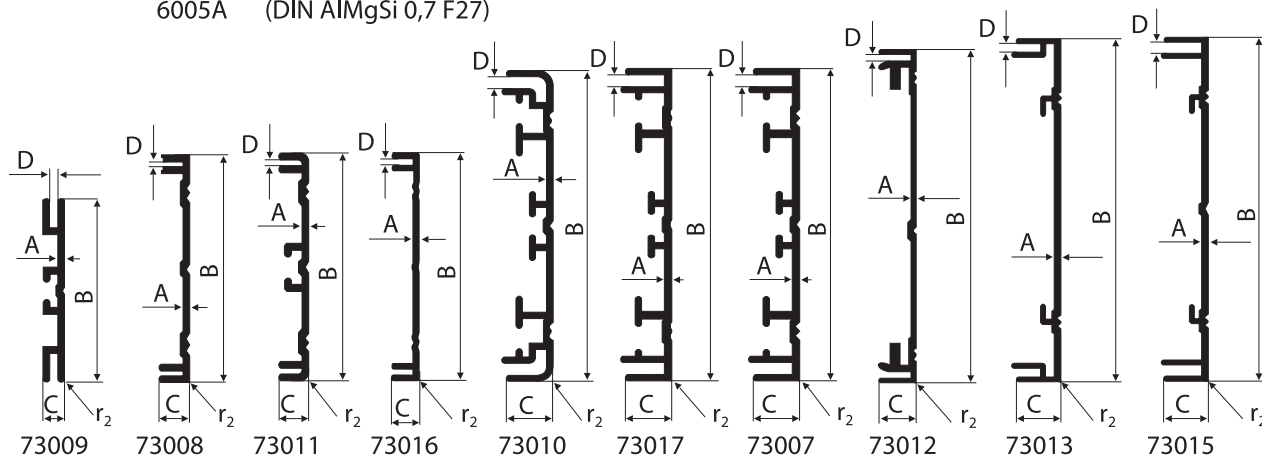


WYMIARY DIMENSION (mm)					OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	D	A	r2 min			
80	8,2	5	1,6	0,5	279,62	0,62	73009
100	12,5	3,5	1,8	0,5	293,50	0,76	73008
100	12,5	3,5	1,8	4	330,84	0,84	73011
100	11	3,5	1,7	0,5	275,97	0,63	73016
139	20,5	6	1,8	6	614,46	1,57	73010
139	20,5	6	1,8	0,5	605,33	1,46	73017
139	20,5	6,2	1,8	0,5	610,09	1,57	73007
160	18	4,5	2	0,5	499,05	1,50	73012
180	23	5	2,2	0,5	591,58	1,79	73013
180	23	6,3	2,2	0,5	594,70	1,81	73015


PROFILE DO POLIWĘGLANÓW SECTIONS FOR POLYCARBONATES



WYMIARY DIMENSION (mm)				OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	D	A			
21,5	24,2	10,2	1,4	135,02	0,25	74008
21,5	30,2	16,2	1,4	149,03	0,28	74009
21,5	20,2	6,2	1,4	126,68	0,24	74010
21,5	22,2	8,2	1,4	132,68	0,25	74011
21,5	34,2	20,2	1,4	155,02	0,29	74016
21,5	39,2	25,2	1,4	165,20	0,31	74015



WYMIARY DIMENSION (mm)				OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	D	A			
9	60	3	1,5	180,49	0,40	10278
9	60	3	1,5	182,27	0,39	71011

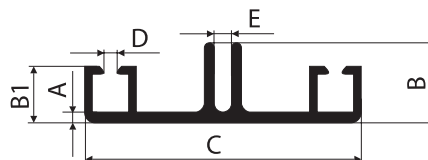

WYMIARY DIMENSION (mm)						OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	B1	C	D	E	A			
17	12	60	3	4	3	272,77	0,69	71009

PROFILE TRANSPORTOWE / SIDE BOARDS SECTIONS

STOPY / 6060 (DIN AIMgSi 0,5 F19)


ALLOYS: 6063 (DIN AIMgSi 0,5 F22)

6005A (DIN AIMgSi 0,7 F27)

PROFILE KASETONOWE
DO POLIWĘGLANÓW,
PROFILE TRANSPORTOWE


FRAMING PROFILES
FOR POLYCARBONATES
SIBE BOARDS SECTIONS

PROFILE GÓRNE / UPPER SECTIONS

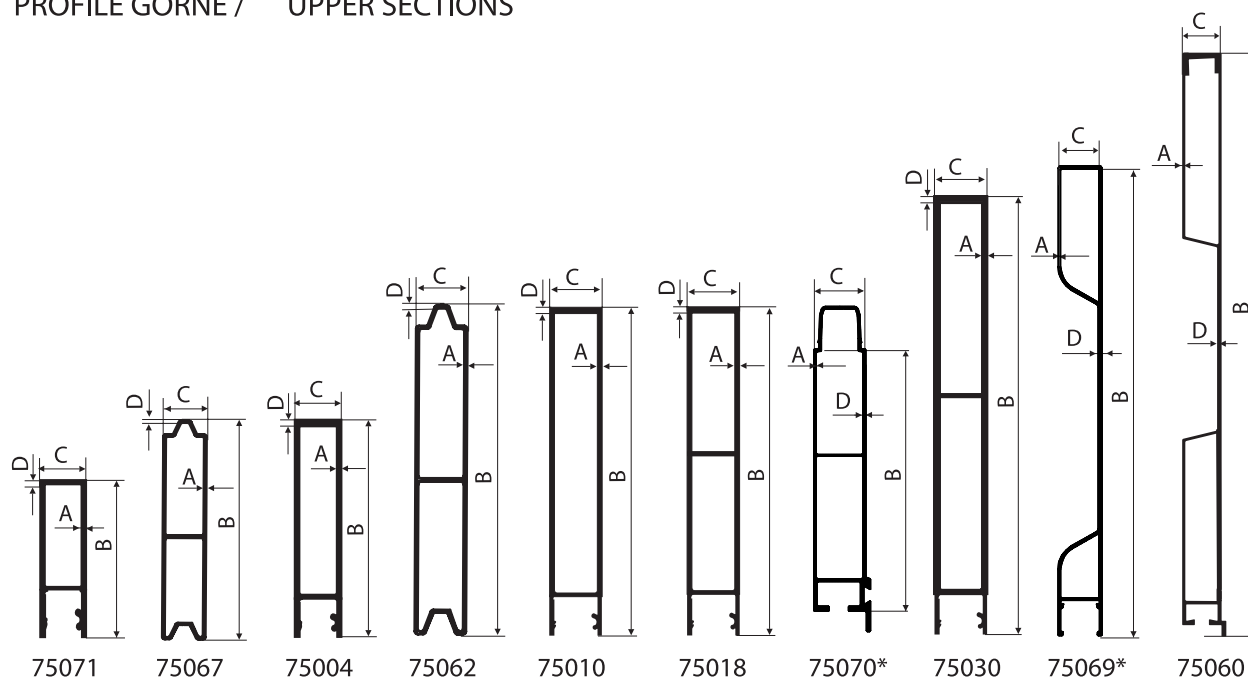

* profile stanowią komplet

WYMIARY DIMENSION (mm)				OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	D			
65	25	1,7	3	225,87	0,907	75071
100	25	1,5	3	254,95	1,112	75067
120	25	1,7	3	335,87	1,412	75004
129,5	25	1,5	1,7	427,90	1,738	75070*
160	25	1,5	-	374,95	1,598	75062
160	25	1,7	3	415,87	1,780	75010
160	25	1,7	3	415,87	1,880	75018
200	25	1,7	3	495,87	2,247	75030
270,5	25	1,4	2,1	660,81	2,164	75069*
410	25	-	-	-	3,902	75069 + 75070
412,8	25	1,6	2,5	957,18	3,982	75060

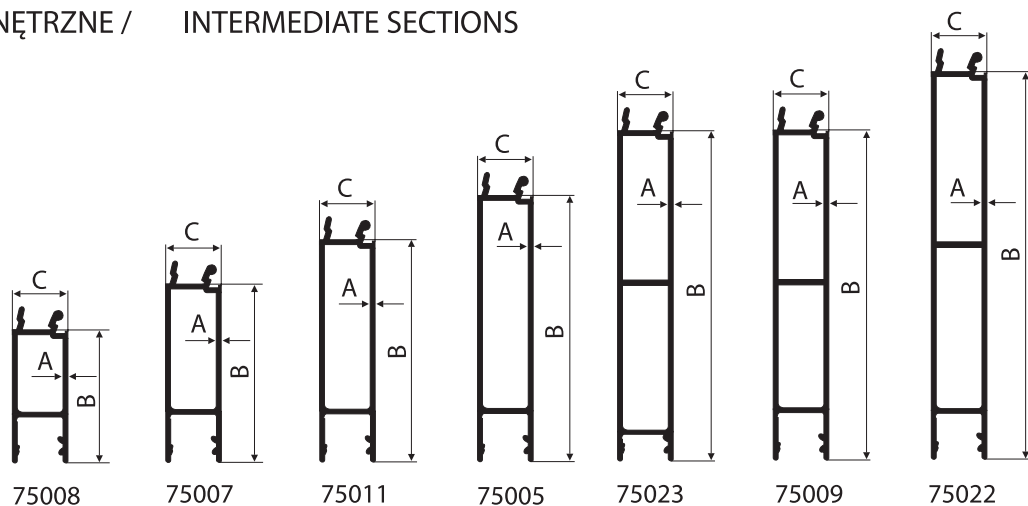


WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A			
60	25	1,7	262,16	0,913	75008
80	25	1,7	302,16	1,096	75007
100	25	1,7	342,17	1,280	75011
120	25	1,7	382,17	1,463	75005
150	25	1,7	417,11	1,837	75023
150	25	1,7	442,17	1,839	75009
190	25	1,7	520,10	2,201	75022


PROFILE DOLNE / LOWER SECTIONS

PROFILE KASETONOWE
DO POLIWĘGLANÓW,
PROFILE TRANSPORTOWE

FRAMING PROFILES
FOR POLYCARBONATES
SIBE BOARDS SECTIONS

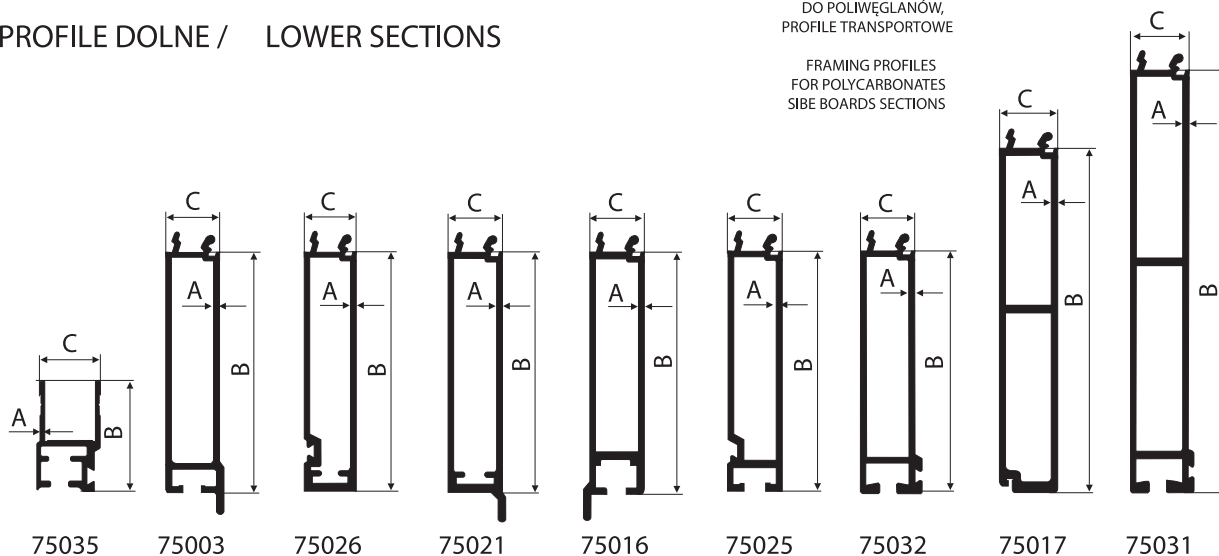

WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A			
55,6	25	2,4	330,06	1,152	75035
120	25	1,7	410,87	1,660	75003
120	25	1,7	348,87	1,669	75026
120	25	1,8	366,93	1,670	75021
120	25	1,7	410,07	1,857	75016
120	25	1,7	394,43	1,614	75025
120	25	1,7	403,68	1,629	75032
150	25	1,7	404,12	1,952	75017
190	25	1,7	543,68	2,453	75031

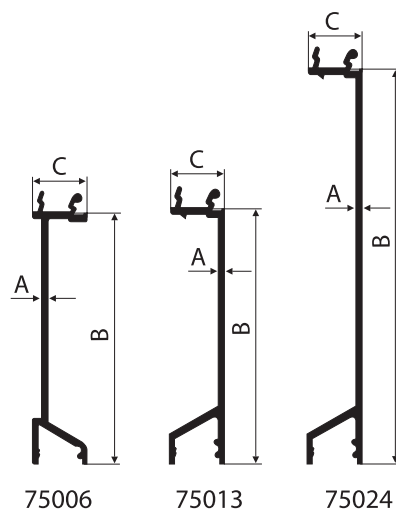


WYMIARY DIMENSION (mm)			OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A			
120	25	2,5	405,35	1,278	75006
120	25	2,5	405,35	1,327	75013
190	25	2,5	405,35	1,800	75024

ODBOJNIKI / FENDERS


PROFILE KASETONOWE
DO POLIWEGLANOW,
PROFILE TRANSPORTOWE

FRAMING PROFILES
FOR POLYCARBONATES
SIBB BOARD'S SECTIONS

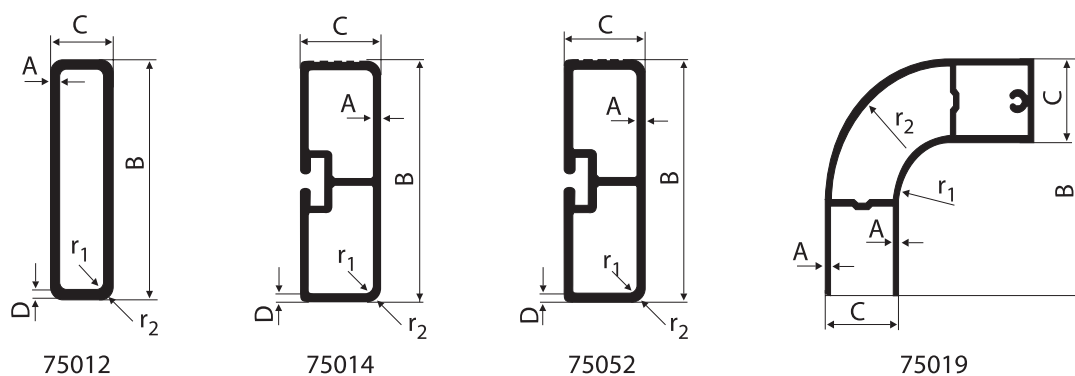


WYMIARY DIMENSION (mm)						OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	D	r1	r2 min			
100	25	2	3	2	3	244,85	1,408	75012
100	30	2	2	0,5	3	302,28	1,737	75014
100	30	1,5	1,5	4,5	6	303,28	1,286	75052
100	34,5	1,8	-	27	60	438,72	1,981	75019


PROFILE ZAMYKAJĄCE / CLOSING SECTIONS




75002



75001



75015




75020

WYMIARY DIMENSION (mm)						OBWÓD PERIMETER (mm)	WAGA WEIGHT (kg/m)	NR PROFILU SECTION NO.
B	C	A	D	r1	r2 min			
37	25,5	2,5	-	0,2	0,5	214,82	0,738	75002
37	25,5	2,5	28	-	-	267,89	0,928	75001
37	25,5	2,5	17	-	-	300,31	1,121	75015
77	25,5	3	30,5	0,5	1,5	363,51	1,231	75020

ZABUDOWY WYWROTKOWE /


PROFILES FOR TIPPER TRUCKS




75049
5,07 kg/m
obwód/perimeter 510,56 mm




75054
0,735 kg/m
obwód/perimeter 111,73 mm




75056
7,868 kg/m
obwód/perimeter 575,92 mm




75057
8,991 kg/m
obwód/perimeter 905,42 mm

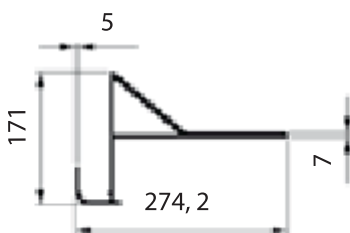


75058
9,113 kg/m
obwód/perimeter 937,55 mm




75036
4,849 kg/m
obwód/perimeter 603,68 mm

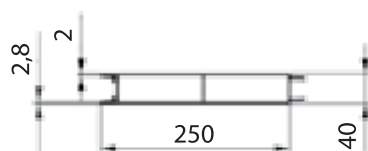


75037
4,385 kg/m
obwód/perimeter 705,36 mm




75039
12,831 kg/m
obwód/perimeter 835,68 mm




75040
8,729 kg/m
obwód/perimeter 610,27 mm




75041
2,900 kg/m
obwód/perimeter 509,21 mm




75043
7,944 kg/m
obwód/perimeter 548,86 mm



75046
7,785 kg/m
obwód/perimeter 622,59 mm



74042
3,396 kg/m
obwód/perimeter 525,68 mm



75038
5,109 kg/m
obwód/perimeter 705,36 mm